The relation between the ...

S/169/62/000/004/099/103
D290/D302

X

free from distortions due to β, can be found. The method also enables correlation analysis to be used in the study of the structures of inhomogeneous fields for arbitrary values of β. 5 references. [Abstractor's note: Complete translation].

Card 2/2

37421
S/188/62/000/002/007/013
B125/B102

9.9000

AUTHORS: Gusev, V. D.; Li Chün

TITLE: Dependence of the measurable parameters of inhomogeneities
             of the ionosphere on its disturbance

PERIODICAL: Moscow. Universitet. Vestnik. Seriya III. Fizika,
             astronomiya, no. 2, 1962, 46-50

TEXT: The geometric and kinematic parameters of the inhomogeneities are
shown to be independent of the distance z from the reference point to the
ionosphere and of the "disturbance factor" β. This finding is based on
the analysis of statistical and correlation properties of rapidly
fluctuating radio waves scattered in the ionosphere. $u(x,y,z)$ is taken as
the field under investigation, and the function $v(x,y,t)$, adjoint to u,
is assumed to be unambiguously determined by a Hilbert integral trans-
formation. Thus, u.v, and the amplitude $A(x,y,t)$ of the scattered field
can be unambiguously represented by

Card 1/4

Dependence of the measurable ...

$$u = a(x, y, t)\cos(\omega_0 t - k_x x - k_y y) + b(x, y, t)\sin(\omega_0 t - k_x x - k_y y),$$
$$v = a(x, y, t)\sin(\omega_0 t - k_x x - k_y y) - b(x, y, t)\cos(\omega_0 t - k_x x - k_y y),$$
$$A(x, y, t) = \sqrt{u^2 + v^2} = \sqrt{a^2 + b^2}.$$

A is slowly variable as a function of time and space and completely determined by its components $a(x,y,t)$ and $b(x,y,t)$. Under the usually satisfied condition of symmetry of fluctuation spectra for steady and spatially uniform processes, the correlation function of the processes a, a_1 and b, b_1, differing in the coordinate shifts by ξ and η, and having a time difference τ, reads

$$R(\xi, \eta, \tau) = \frac{\overline{a_1 a} - \overline{a}^2}{\sigma^2} = \frac{\overline{b_1 b} - \overline{b}^2}{\sigma^2}, \quad \overline{a_1 b} = \overline{a b_1} = 0,$$

$\sigma^2 = \overline{a^2} - \overline{a}^2 = \overline{b^2} - \overline{b}^2$ is the dispersion of the process. Moreover, $\overline{a} = a_0 \cos\varphi_0$, $\overline{b} = a_0 \sin\varphi_0$, where a_0 denotes the amplitude, and φ_0 the phase

Card 2/4

Dependence of the measurable ...

of the so-called "mirror component." With normal random processes, the correlation function $\rho(\xi, \eta_i, \tau)$ of the amplitude of the scattered wave can be expanded in a series of hypergeometric functions:

$$\rho(\xi, \eta, \tau) = \frac{\overline{A_1 A} - \overline{A}^2}{\overline{A^2} - \overline{A}^2} = f(\beta, R), \qquad (1);$$

$\beta^2 = a_0^2/2\sigma^2$. The effective width with respect to time of the correlation function of the field amplitude is $\tau_0^2 = F(\beta)/(\delta\omega)^2$ with

$$F(\beta) = 2(1 + \beta^2)[1 - K(\beta)],$$

$$K(\beta) = \frac{\pi}{4(1 + \beta^2)} e^{-\beta^2} \left\{ I_0\left(\frac{\beta^2}{2}\right) + \beta^2 \left[I_0\left(\frac{\beta^2}{2}\right) + I_1\left(\frac{\beta^2}{2}\right) \right] \right\}^2.$$

The results permit the correlation processing of the inhomogeneous field structure for any values of β and the determination of the actual spectrum of inhomogeneity dimensions, which is free of distortion by β.

Card 3/4

Dependence of the measurable ..,

S/188/62/000/002/007/013
B125/B102

ASSOCIATION: Kafedra rasprostraneniya radiovoln (Department of the Propagation of Radio Waves)

SUBMITTED: June 20, 1961

Card 4/4

GUSEV, V.D.; KIYANOVSKIY, M.P.

Use of the correlation method. Izv.vys.uch.zav.; fiz. no.4:171-
173 '62.   (MIRA 15:9)

1. Moskovskiy gosudarstvennyy universitet imeni Lomonosova.
(Ionospheric research)

LI TSZYUN' [Li Chun] ; GUSEV, V. D.

Dependence of the measureable parameters of the non-homogeneities
of the ionosphere on its perturbability. Vest.Mosk.un.Ser.3.
Fiz.,astron. 17 no.2:46-50 Mr-Ap '62.   (MIRA 16:2)

1. Kafedra rasprostaneniya radiovoln Moskovskogo universiteta.
                        (Ionosphere)

GUSEV, V. D.; MIRKOTAN, S. F.; KIYANOVSKIY, M. P.; BEREZIN, I. B.

"Phase Investigations of the Ionosphere Drifts."

summary to be presented at 13th Gen Assembly, IUGG, Berkeley, Calif, 19-31 Aug 63.

L 9976-65   EWT(1)/EWG(v)/FCC/EEC-4/EEC(t)/EWA(h)   Po-4/Pe-5/Pq-4/Pae-2/Peb/
PI-4   RAEM(a)/ESD(c)/ESD(t)   GW/WS

ACCESSION NR: AP4046281   S/0203/64/004/005/0832/0841

AUTHOR: Gaylit, T. A.; Gusev, V. D.

TITLE: Spectral characteristics of a field during a diffraction on an irregular screen

SOURCE: Geomagnetizm i aeronomiya, v. 4, no. 5, 1964, 832-841

TOPIC TAGS: Fresnel zone, ionosphere, ionospheric electromagnetic field

ABSTRACT: The principal source of information on the nonhomogeneous structure
of the ionosphere has been the study of the properties of a nonhomogeneous elec-
tromagnetic field which is diffracted in the ionosphere and received at the sur-
face. However, the interpretation of these experimental results involves diffi-
culties. The statistical properties of the wave field at the earth's surface
are determined by the conditions for propagation in a nonhomogeneous medium and
by propagation in the free space from the layer to the earth. The author refers
to the field at emergence from the ionosphere as a field on a screen. With fur-
ther propagation of a wave from the screen to the plane of observation, the
statistical characteristics of the random field change appreciably. The spatial
correlation function of the true part of the complex amplitude of the field is

Card 1/3

L 9976-65

ACCESSION NR: AP4046281

also dependent on the distance L to the screen. In a general case this dependence is complex and is integrated to the end only for $D \gg 1$. The properties of the random field are dependent on the value of the parameter D, and also play a major role in problems of diffraction on regular objects. Diffraction on regular limited objects is also characterized by the presence of intensity oscillations of the Fresnel integral type in the diffraction pattern. The problem of diffraction on an irregular screen, together with features in common for all diffraction problems, has a number of peculiarities associated with the presence of two components in the scattered field: coherent and random. This paper, with the foregoing considerations as background, attempts to clarify certain of these peculiarities of the diffraction pattern. Specifically, the spatial energy spectra of field fluctuations and of the square of the amplitude of a field diffracted on an infinite nonhomogeneous screen are expressed at the distance L from the screen through the field spectrum on the screen, determined by the statistical properties of the latter. This dependence is derived for both "weak" and "deep" phase and amplitude screens. When there is a coherent component in the scattered field, the spectrum of the square of the field amplitude, beginning at some distance L from the screen, contains an oscillating term with a frequency which is a multiple of the value of the Fresnel zone. The depth of the oscillations decreases with a decrease in the role of the coherent component in the signal. Orig. art. has: 41 formulas and 2 figures.

Card 2/3

L 9976-65
ACCESSION NR: AP4046281

ASSOCIATION: Fizicheskiy fakul'tet, Moskovskiy gosudarstvennyy universitet
(Physics Department, Moscow State University)

SUBMITTED: 10Jan64   ENCL: 00   SUB CODE: ES

NO. REF SOV: 002   OTHER: 004

Card 3/3

AUTHOR: Nad', A.A., Gusev, V.D.

                                                          113-58-7-9/25

TITLE: Push-Button Control of the Transmission (Knopochnoye upravleniye
              korobkami peredach)

PERIODICAL: Avtomobil'naya promyshlennost', 1958, Nr 7, pp 18-20 (USSR)

ABSTRACT: The new ZIL-111 automobile which will be released in 1958, has
              been equipped with a push-button control of the transmission.
              The experimental model of the M-13 automobile of the Gor'kov-
              skiy avtozavod (Gor'kiy Automobile Plant) also has such a push-
              button control and the GAZ-13 have this control similar to
              that of Chrysler and Plymouth types. There is a mechanical
              (Photo 1) and an electrical (Photo 3) push-button control, the
              latter experimentally installed in the ZIL-111, where the
              electromotor, change-over switch and decelerator have been
              assembled in one unit measuring 240 x 140 x 85 mm. The weight
              usually does not exceed 1.25 kg. The characteristics are com-
              pared with those of American makes. A general recommendation
              to adopt this type of transmission control for all Soviet
              light cars must be preceded by comparative experiments with
              both types of push-button control over an extended period
              of time. There are 3 photos and 1 schematic diagram.

Card 1/2

Push-Button Control of the Transmission   113-58-7-9/25

ASSOCIATION: Moskovskiy avtozavod imeni Likhacheva (The Moscow Car Plant
               imeni Likhachev)

               1. Automobiles--Operation   2. Automatic transmissions--Control systems

Card 2/2

GUSEV, V.D.; PASSCHAK, V.K.

Reconstruction of brush holders of a slip ring. Stor. rats.
predl. vnedr. v proizv. no.2:46-47 '61.   (MIRA 14:7)

1. Magnitogorskiy metallurgicheskiy kombinat.
(Brushes, Electric)

GUSEV, V.D.

From the experience on automation in a coal preparation plant.
Koks i khim. no.9:21-24 '61. (MIRA 15:1)

1. Magnitogorskiy metallurgicheskiy kombinat.
 (Magnitogorsk--Coal preparation plants--Equipment and supplies)
                    (Automatic control)

GUSEV, V.D.

Device for the distribution of roving bobbins on the spinning machine frame. Tekst.prom. 21 no.6:41-42 Je '61.

(MIRA 15:2)

1. Nachal'nik byuro teknicheskoy informatsii Furmanovskoy pryadil'no-tkatskoy fabriki No.2
(Spinning machines)

KRIVONOS, S.V., magistral'nyy inzh.; GUSEV, V.D., magistral'nyy inzh.

Protective circuits for decreasing interference. Vest. sviazi
21 no.8:12-13 Ag '61.   (MIRA 14:9)

1. Instruktory Upravleniya mezhdugorodnoy telegrafno-telefonnoy
seti Ministerstva svyazi RSFSR.
        (Telephone lines) (Shielding (Electricity))

GUSEV, V. F.

USSR/Medicine - Veterinary - New Drugs   Jul 53

"The Application of Tiargen (I) in the Treatment of Babesiasis of Cattle," A. I. Shmylevich. Cand of Vet Sci

Veterinariya, Vol 30, No 7, pp 26-27

Compares favorably the effects of I (sodium pentathiosulfate-argentate) with those of albargin, hemosporidin and other drugs, in the treatment of Babesia bovis. According to protozoologist V.F. Gusev, I produces a rapid elimination of parasites from the peripheral blood, halts the progress of the disease, eliminates complications in the gastro-intestinal tract, and results in the

273T61

quicker recovery of diseased animals. I, administered intravenously in doses of 0.001g to one kg of weight in a 1-2% concn, cured 99.53% of the animals treated. I was recently synthesized by G.A. Gorkusha and A.I. Shmulevich at the Chem- Ther Lab of the State Sci-Control Inst of Vet Prepns, Min of Agric and Procurement USSR.

USSR

Contracting and prophylactic effects of SK-9 on mites. V. F. Gusev. Sbornik Nauch. Trudov, Leningrad. Inst. Usovershenstvovaniya Vet. Vrachei 1953, No. 8, 5-8; Referat. Zhur., Khim. 1954, No. 34734.—Treatment of domestic animals with 3-5% aq. emulsion of SK-9 (cf. Kazakov, C.A. 46, 11880e) prepn. kills all stages of Ixodes ricinus and Dermacenter pictus except in the case of engorged females. The prepn. possesses no prophylactic properties.   B. W.

USSR / Zooparasitology. Mite and Insect Vectors of   G
Disease Agents. Acarids.

Abs Jour : Ref Zhur - Biologiya, No 5, 1959, No. 19719

Author   : Gusev, V. F.
Inst   : Leningrad Scientific-Research Veterinary
            Institute
Title   : Study of the Regional Epizootology of
            Haemosporidiasis in Farm Animals of the
            Belorussian SSR

Orig Pub : Sb. tr. Leningr n.-i. vet. in-t, 1957,
            vyp 7, 96-106

Abstract : The basic carriers of haemosporidiasis in
            farm animals of BSSR are the ticks Ixodes
            ricinus and Dermacentor pictus. The first
            of these is widespread in the Republic and
            transmits babesiasis and francaiellosis in

Card 1/2

Card 2/2

29

GUSEV, V.F., dots.; PIROG, P.P., prof.; DRYAGIN, S.V., starshiy nauchnyy
sotrudnik.

Sixtieth anniversary of the first veterinary research institution
in Russia. Veterinariia 35 no.8:11-13 Ag '58.   (MIRA 11:9)

1. Direktor Leningradskogo nauchno-issledovatel'skogo veterinarnogo
instituta (for Gusev). 2. Zamestitel' direktora po nauchnoy chasti
Leningradskogo nauchno-issledovatel'skogo veterinarnogo instituta
(for Pirog). 3. Uchenyy sekretar' Leningradskogo nauchno-issle-
dovatel'skogo veterinarnogo instituta (for Dryagin).
                (Leningrad--Veterinary colleges)

SHARABRIN, I.G., prof.; GUSEV, V.; KOROSTELEV, P.M.; LAPSHIN, I.I.

Throughout the Soviet Union. Veterinariia 35 no.11:92-94
N '58.   (MIRA 11:11)
(Veterinary medicine)

GUSEV, V.F., kand.veterinarnykh nauk

Leningrad Veterinary Research Institute.   Trudy VIEV 23:330-337 '59.
(MIRA 13:10)

(Leningrad--Veterinary research)

GUSEV, V. F., STUPNIKOV, A. A., BASHMURING, A. F., MOTRICH, T. A. and VIL'NER, E. A.
(Leningrad Scientific Research Veterinary Institute)

"Concerning the problem of toxicity of dithiophos"

Veterinariya, vol. 39, no. 7, July 1962 pp. 84

G . . T.P.; CHICKAROV, A.A.; RUCHKINA, A.P.; Torodan, ...' . ., I....
. . . . . . loghov. Veterinariia 39 n..7:84-86   Jl '62.
(MIRA 15:1)

1. Leningradskiy nauchno-issledovatel'skiy veterinarnyy institut.

GUSEV, V.F.; STUPNIKOV, A.A.

Toxicology of the repellent hexamide (R-401). Veterinariia 41
no.6:112-113 Je '64.   (MIRA 18:6)

1. Leningradskiy nauchno-issledovatel'skiy veterinarnyy institut.

GUSEV, V.F.; STEPANKOV, A.A.; BASIMURIN, A.F.; METRICH, T.A.; VIL'NER, E.A.

Response to our opponents. Veterinariia 41 no.12:70-72 D '64.
(MIRA 18:9)

1. Leningradskiy nauchno-issledovatel'skiy veterinarnyy institut.

L 37698-66

ACC NR: AP6022211

SOURCE CODE: UR/0115/66/000/005/0085/0085

19
2.

AUTHOR: Gusev, V. F.

ORG: none

TITLE: Parabolic micromanometer

SOURCE: Izmeritel'naya tekhnika, no. 5, 1966, 85

TOPIC TAGS: pressure gage, micropressure gage, parabolic micropressure gage

ABSTRACT: Vertical alcohol manometers and inclined micromanometers are normally used for measuring low air and gas pressures. When used for wider pressure ranges these devices are limited by their size and the need for additional computations. Usually it is velocity instead of air pressure which is being determined, thus resulting in possible computation errors. N. S. Mitrofanov has invented an instrument which is free from these limitations (see Fig. 1). This device has greater accuracy

Card 1/2

UDC: 531.787
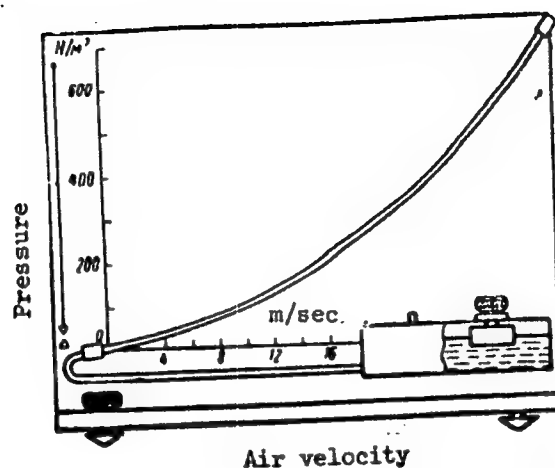
L 37698-66

ACC NR: AP6022211

Fig. 1. Parabolic micromanometer

than the inclined micromanometer, particularly in the measurement of velocities.
Orig. art. has: 1 figure.   [SA]

SUB CODE: 14, 20/   SUBM DATE: none/ ORIG REF: 001/   ATD PRESS: 5041

Card 2/2

TUPUBINER, A.L.; GURSKIY, G.L.; SAVIN, A.I.; TEREKHOV, A.I.; GUSEV, V.F.;
LEBEDEVA, V.F.

Influence of thermal conditions on the self-carburation and radiation
of the natural gas flame. Stal' 24 no.11:985-989 N '64.
(MIRA 18:1)

GUSEV, Vasiliy Fedorovich; SHUL'MEYSTER, B.I., inzhener, redaktor;
MATVEYEVA,Ye.M., tekhnicheskiy redaktor

[Assembling and repair of turbocompressors] Montazh i naladka turbo-
kompressorov. Izd. 3-e. Moskva, Gos. nauchno-tekhn. izd-vo mashino-
stroit. lit-ry, 1956. 177 p.   (MLRA 10:1)
        (Compressors)

KUZNETSOV, G.S., prof., otv. red.; BOCHAROV, I.A., prof., red.; VOKKEN,
     G.G., prof., red.; TSION, R.A., prof., red.; DMITROCHENKO, A.P.,
     prof., red.; SINEV, A.V., prof., red.; FEDOTOV, B.N., prof.,
     red.; CHERNYAK, V.Z., prof., red. Prinimali uchastiye:
     NIKOL'SKIY, S.N., prof., red.; KHEYSIN, Ye.M., prof., red.;
     GUSEV, V.F., dots., red.; KOLABSKIY, N.A., dots., red.

[Papers presented at the Conference on Protozoological Problems
Dedicated to the 90th Anniversary of the Birth of Professor V.L.
IAkimov] Sbornik rabot Nauchnoi konferentsii po protozoologicheskim
problemam, posviashchennaia 90-letiiu so dnia rozhdeniia professora
V.L.IAkimova. Leningrad, 1961. 292 p.   (MIRA 15:6)

1. Nauchnaya konferentsiya po protozoologicheskim problemam, pos-
vyashchennaya 90-letiyu so dnya rozhdeniya professora V.L. Yakimova.
2. Stavropol'skiy sel'skokhozyaystvennyy institut (for Nikol'skiy).
3. Institut tsitologii Akademii nauk SSSR (for Kheysin). 4. Lenin-
gradskiy veterinarnyy institu (for Kolabskiy).
                    (Protozoology--Congresses)

GUSEV,V.F., inzhener; MOLOTKOV,G.A., inzhener; TURUBINER,A.L., inzhener

The use of forsterite brick in checkerwork. Stal' 15 no.9:838-841
S '55.   (MIRA 8:12)

1. Zavod "Zaporozhstal'"
                        (Refractory materials)

KIORESKO, B.V.; GUSEV, V.F.; TURUBINER, A.L.; MOLOTKOV, G.A.; SAVIN, A.I.

Automatization of open-hearth furnaces at the Zaporozhstal' Plant.
Stal' 16 no.8:689-697 Ag '56.   (MLRA 9:10)

1.Zavod "Zaporozhstal'."
(Zaporozh'ye--Open-hearth furnaces) (Automatic control)

GUSEV, Vyacheslav Fedorovich: TURUBINER, Anatoliy L'vovich; SAMOKHVALOV, Ya.,
vedushchiy redaktor; MATUSEVICH, S., tekhnicheskiy redaktor

[Equipment and apparatus for automatic control of open-hearth
furnaces] Pribory i apparatura avtomaticheskogo upravleniia
martenovskimi pechami. Kiev, Gos.izd-vo tekhn.lit-ry USSR, 1957.
111 p.   (MLRA 10:8)
         (Automatic control)   (Open-hearth furnaces)

Gusev, Vyacheslav F.,

AUTHORS: Gusev, Vyacheslav F., Turubiner, Anatoliy L.

TITLE: Instruments and Equipment Used in Automatic Control of
                Open-hearth Furnaces (Pribory i apparatura avtomati-
                cheskogo upravleniya martenovskimi pechami)

PUB. DATA: Gosudarstvennoye izdatel'stvo tekhnicheskoy literatury
                USSR, Kiyev, 1957, 114 pp., 1950 copies

ORIG. AGENCY: None given

EDITORS: Editor-in-Chief: Samokhvalov, Ya.;Tech. Ed.:Matusevich,S.;
                Correctors: Pokikarpova, N., Riys, V.

PURPOSE: This booklet is designed for foremen, melters and
                workers operating open-hearth furnaces. It can also be
                used for self-education and as a textbook for vocational
                courses.

COVERAGE: The book discusses problems of automatic control of
                open-hearth furnaces with gaseous fuel firing. Automatic
                control systems are examined and fundamental information
                on heat control and controllers used in open-hearth
Card 1/3   furnaces of the "Zaporozhstal'" foundry are presented.

Call Nr: TN 740.F8

Instruments and Equipment Used in Automatic Control of Open-hearth Furnaces

Improvements made in the automatic control system are described and the results obtained are demonstrated. No personalities are mentioned. There are 10 bibliographic references, all USSR.

Card 2/3

Instruments and Equipment Used in Automatic Control of Open Hearth-Furnaces

YUPKO, L.D.; TRUBETSKOV, K.M.; GURSKIY, G.L.; TEREKHOV, I.A.; GUSEV, V.F.;
        VOYTOV, A.O.

    Accelerating open-hearth furnace smelting with an increased use of
    oxygen. Stal' 23 no.1:16-19 Ja '63.   (MIRA 16:2)

    1. Zavod "Zaporozhstal'", TSentral'nyy nauchno-issledovatel'skiy
    institut chernoy metallurgii i TSentroenergochermet.
     (Open-hearth process)   (Oxygen--Industrial applications)

BESPAL'KO, I.G., red.; GUSEV, V.F.; YEVDOKIMOV, F.D. prof.,red.;
IVANOV, S.M., red.; NIKULIN, V.N., red.; SICHIOKNO,
G.A., red.; SIPTSOV, A.S., red.

[Transactions of the scientific conference on production]
Trudy nauchno-proizvodstvennoi konferentsii. Pskov, 1962.
341 p.   (MIRA 18:2)

1. Leningrad. Nauchno-issledovatel'skiy veterinarnyy in-
stitut. 2. Nachal'nik veterinarnogo otdela Pskovskogo
oblastnogo upravleniya proizvodstva i zagotovok sel'sko-
khozyaystvennykh produktov i Leningradskiy Nauchno-
issledovatel'skiy veterinarnyy institut (for Nikulin).
3. Leningradskiy veterinarnyy institut (for Yevdokimov).

GUSEV, V.G. [Huseu, V.H.], kand.biol.nauk; PANKEVICH, T.P.

Formation of niduses and phenology of the Colorado beetle in the
White Russian S.S.R. Vestsi AN BSSR. Ser.biial.nav, no.3:35-43
'58.   (MIRA 11:11)
                    (White Russia--Potato beetle)

GUSEV, V. G.

"Shortcomings of the Rodina Receiver," Radio, No. 4, 1948;

GUSEV, V. G.

"Improving Amateur Operation by Keeping the Air Clear" Radio, No. 2, 1949.

GUSEV, V. G.

"The Moskvich-V' Reveiver," Radio, No. 6, 1949.

GUSEV, V. G.

"From the Transmitter to the Receiving Antenna," Radio, No. 11, 1949.

GUSEV, V. G.

Cand Tech Sci - (diss) "Performance of hydro-aggregates in
a variable pressure head condition and with variable rate of
rotation on the line of transfer of power using direct current."
Novosibirsk, 1961. 17 pp; (Academy of Sciences USSR, Siberian
Division, Joint Academic Council for Physics-Mathematics, and
Technical Sciences); 220 copies; price not given; (KL, 7-61 sup,
234)

L 45657-66   EWT(d)   IJP(c)

ACC NR: AP6021392   SOURCE CODE: UR/0103/66/000/006/0082/0089

AUTHOR: Gusev, V. G. (Leningrad)

ORG: none

TITLE: Estimating the relative mean-square error in the realization of linear operators on a digital computer

SOURCE: Avtomatika i telemekhanika, no. 6, 1966, 82-89

TOPIC TAGS: linear operator, digital computer, real time computer , MEAN SQUARE ERROR

ABSTRACT: In this article a method is proposed for estimating the error due to the time-quantizing step when working out linear operators on an electronic digital computer. This method of error estimation in the time area is based on the value of the deviations of the amplitude and phase frequency characteristics of the continuous and corresponding discrete systems. A simplified formula is derived whereby the relative mean-square error introduced by the time-quantizing process can be estimated with a fair degree of accuracy. Orig. art. has 21 formulas.

SUB CODE: 09/   SUBM DATE: 28Oct65/   ORIG REF: 003/   OTH REF: 001

Cord 1/1 egk   UDC: 62-504.2:681.142

L 7985-66

ACC NR: AP5026519   ENT(1)/EPA(s)-2/ENT(m)/EPF(c)/EPF(n)-2/T/ETC(m)   WW/DJ

AUTHORS: Gusev, V. I.; Mironov, S. G.; Piskalov, L. M.; Karpov, Ye. N.

ORG: none

TITLE: A device for lubricating vacuum pumps, Class 27, No. 175165 [announced by Enterprise of the State Committee for Defense Technology, SSSR (Predpriyatiye gosudarstvennogo komiteta po oboronnoy tekhnike SSSR)]

SOURCE: Byulleten' izobreteniy i tovarnykh znakov, no. 19, 1965, 50

TOPIC TAGS: pump, vacuum pump, mechanical engineering

ABSTRACT: This Author Certificate presents a device for lubricating vacuum pumps. The device contains a cutoff valve operated by a centrifugal governor kinematically connected to the shaft of the pump (see Fig. 1). To simplify the construction, the governor is mounted on the shaft bracket, and the movable clutch of the governor is provided with a bearing which opens or closes the valve when the pump is being stopped or started.

Card 1/2

SOURCE CODE: UR/0286/65/000/019/0050/0050

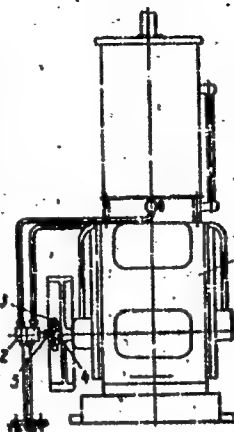UDC: 621.521.-72

L 7985-66

ACC NR: AP5026519

Fig. 1.   1- pump; 2- valve; 3- centrifugal governor; 4- pump shaft;
          5- bearing

Orig. art. has: 1 figure.
SUB CODE: IE/ SUB DATE: 21Jul64
Card 2/2

L 10082-66   EWT(1)/EWG-2/T   IJP(c)   JdS

ACC NR: AT6001385   SOURCE CODE: UR/3180/64/009/000/0027/0028

AUTHOR: Provornov, S. M. (Professor); Grebennikov, O. F. (Candidate of technical sciences; Docent); Gusev, V. P.

ORG: none

59
B+1

TITLE: Scanning camera capable of 500 million frames per second

SOURCE: Akademiya nauk SSSR. Komissiya po nauchnoy fotografii i kinomatografii. Uspekhi nauchnoy fotografii, v. 9, 1964, 27-28

TOPIC TAGS: high speed camera, motion picture camera, plasma research/RKS-1 motion picture camera, RKS-2 motion picture camera, 16S-2 motion picture camera

ABSTRACT: A group of designers associated with the Leningrad Institute of Motion Picture Engineers has perfected their RKS-1 camera. Originally developed in 1958 with a capacity of 100 million frames per second, the camera's exposure frequency has now been increased to 500 million frames per second for use in the investigation of certain plasma, light amplification, chemical, and nuclear processes. The general arrangement of the new camera, the RKS-2, is shown in a diagram. The camera is provided with three exchange lenses with focal lengths of 35, 50 and 85 mm. The camera is suitable for both macro- as well as microphotographs. The scanning is effected by either of two point rasters (0.4 and 0.7 mm spacing, giving a capacity of 90 and 250 frames, respectively). The two mirrors rotate at 30,000 rpm. Twenty-four exposure frequencies can be selected with 10 sup 7 frames per second. The mirror rotating system develops and transmits a synchronizing signal to the object at a pre-set speed. The decoding of the images can be accomplished in the camera. The 16S-2 motion picture camera can be used for transfer of the images to 16 mm film. Orig. art. has 1 figure.

Card 1/1   SUB CODE: 14, 20/ SUBM DATE: none/ ORIG REF: 002

L 08578-67   EWP(m)/EWT(1)/EWT(m)   WW/JW/JWD/WE

ACC NR: AP6033492   SOURCE CODE: UR/0413/66/000/018/0115/0115

INVENTOR: Grishin, S. D.; Gusev, V. L.; Denisov, Yu. N.; Mironov,
S. G.; Serbinov, A. I.; Troshin, Ya. K.

ORG: none

TITLE: Shock tube for determining the ignition induction period of com-
bustible mixtures. Class 42, No. 186166

SOURCE: Izobret prom obraz tov zn, no. 18, 1966, 115

TOPIC TAGS: shock tube, fuel ignition, fuel ignition induction period,
air fuel combustion

ABSTRACT: The proposed shock tube for determining the ignition induc-
tion period of combustible mixtures contains a test section and a sec-
tion separated by a membrane for initiating the detonation. In order
to decrease the size of the shock tube, the section for initiating the
shock is made in the form of a helix (see Fig. 1). Orig. art. has:
1 figure.   [WA No. 68]

Card 1/2   UDC: 534.222.2.002.51

L 08578-67

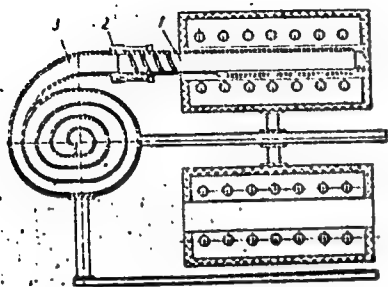ACC NR: AP6033492   0

Fig. 1. Shock tube

1 - Test section; 2 - membrane;
3 - section for initiating det-
onation.

SUB CODE: 21/ SUBM DATE: 08Jun65

Card 2/2

L 43909-66   EWT(m)/EWP(j)/T   RM
ACC NR: AP6015669   (A)   SOURCE CODE: UR/0413/66/000/009/0075/0075   33

INVENTOR: Kuznetsov, Ye. V.; Gusev, V. I.; Semenova, L. S.; Shurygina, L. A.

ORG: none

TITLE: Method of obtaining organophosphorus polymers. Class 39, No. 181290

SOURCE: Izobreteniya, promyshlennyye obraztsy, tovarnyye znaki, no. 9, 1966, 75

TOPIC TAGS: polymerization, catalyst, titanium tetrachloride, trietylaluminum, organophosphorus polymer

ABSTRACT: An Author Certificate has been issued for a method of obtaining organophosphorus polymers by polymerization of unsaturated phosphates in a medium of an inert liquid upon heating in the presence of a catalyst. To expand the variety of catalysts, the system of titanium tetrachloride—trietylaluminum is used as the catalyst. [Translation]   [NT]

SUB CODE: 11/ SUBM DATE: 22Feb62/
.07/
Card 1/1   UDC: 678.745.73

ACC NR: AP6029052   (A)   SOURCE CODE: UR/0413/66/000/014/0080/0081

INVENTORS: Kuznetsov, Yo. V.; Gusev, V. I.; Zhidkova, T. N.; Andreyeva, I. N.;
Semenova, L. S..

ORG: none

TITLE: A method for obtaining copolymers of propylene. Class 39, No. 183938

SOURCE: Izobret prom obraz tov zn, no. 14, 1966, 80-81

TOPIC TAGS: polymer, copolymer, propylene, polymerization, ester, phosphoric acid,
catalyst,   titanium compound, aluminum compound

ABSTRACT: This Author Certificate presents a method for obtaining copolymers of
propylene with unsaturated compounds in the medium of an inert carbonaceous solvent
at the temperature from 20 to 60C. The process is carried out in the presence of a
catalyst consisting of titanium tetrachloride and aluminum alkyls. To impart the
property of fire resistance to the copolymers, unsaturated mixed esters of phosphoric
acid are used as the unsaturated compounds.

SUB CODE: 11/   SUBM DATE: 06Sep62
          07/

UDC: 678.742.3-134.573

Card 1/1

CA

PROCESSES AND PROPERTIES INDEX

Extraction of aluminum from the ash Moscow
coals. V. I. Ossov, M. E. Sanko and heirs of P. A.
Saladovnikov. Brit. 31,488, Oct. 21, 1938. The ash is
mixed with (NH₄)₂SO₄ and NH₄F and burned at temp.
exceeding 400° until Al₂(SO₄)₃ is formed.

METALLURGICAL LITERATURE CLASSIFICATION

CC

Separating iron from solutions of aluminum sulfate.
V. I. Gusev, M. K. Strahe and N. M. Glagolev. Russ.
23,480, Oct. 31, 1933. In the electrolytic sepn. of Fe
from $Al_2(SO_4)_3$ an Fe-Hg amalgam is used as cathode.

ASM-SLA METALLURGICAL LITERATURE CLASSIFICATION

The properties of zinc-chromium catalysts for the synthesis of methanol. K. I. Ivanov and V. I. Gusev. *J. Chem. Ind.* (Moscow) 12, 1143-6(1935).—When a catalyst of 8ZnO.1.5Cr$_2$O$_3$ is first used, it is most efficient at 370°, but as its use is continued, the optimum temp. rises slowly to 400°. Very high rates of passing the gas over it favor MeOH formation, while low rates of passing the gas, or temps. above 400° begin to favor CH$_4$ formation.

H. M. Leicester

PROCESSES AND PROPERTIES INDEX

An automatic apparatus for determining the pH value by means of a glass electrode. P. G. Kovalenko and V. I. Gusev. *Zavodskaya Lab.* 6, 1008-7(1939); *Khim. Referat. Zhur.* 1940, No. 4, 65-6.—The app. consists of (1) a spherical glass electrode coupled with a std. calomel half cell; (2) an augmenting lamp; (3) a reconstructed mechanism of a "Micromax" type recorder. A 2-v. heating battery and a 80-v. anode battery are used as the source of current. The pH values are recorded on a paper ribbon. Light and sound signals are automatically given when the limiting pH value is reached. W. R. H.

METALLURGICAL LITERATURE CLASSIFICATION

Catalytic transformations of heterocyclic compounds.
XVII. The use of the reaction of transformation of oxy-
gen-containing heterocyclic compounds into nitrogen-
and sulfur-containing compounds in establishing the
structure of cyclic oxides. Yu. K. Yur'ev, V. A. Sazen,
V. A. Tronova and P. P. Yurolin. *J. Gen. Chem.* (U. S.
S. R.) 11, 344-8(1941); cf. C. A. 35, 1577. The compd.
obtained by Franke and Lieben (C. A. 9, 910) by dehydra-
tion of 1,6-hexanediol with H_2SO_4 was stated by them to be
2-methyltetrahydropyran. The dehydration actually
yields a mixt. of compds., but the chief product b.p. 108-5°.
When it is passed over Al_2O_3 at 300° in an NH_3 stream, it
gives 2-ethylpyrrolidine, and when the gas is H_2S, the
product is *2-ethyltetrahydrothiophene*, b.p. 155.3-0.5°, n_D^{20}
1.4890, d_4^{20} 0.9451, MR calcd. 35.08, found 35.06 ($HgCl_2$
compd., m. 100°). The structure of this is proved by its
prepn. from synthetic 2-ethyltetrahydrofuran (I). Thus
the compd. of F. and L. is actually I. An increased no.
of C atoms in the side chain of substituted γ-alkylene
oxides causes a lower yield of product when they are con-
verted to the corresponding N and S compds.

H. M. Leicester

GUSEV, V. I.

USSR/ Chemistry – Chemical technology

Card   1/1   :   Pub. 22 – 33/49

Authors   :   Gusev, V. I., and Chistozvonov, D. B.

Title   :   Formation of water during the synthesis of methanol from carbon monox-
ide and H_2O

Periodical   :   Dok. AN SSSR 98/4, 629-631, Oct. 1, 1954

Abstract   :   The phenomenon of H_2O formation, which takes place during the synthe-
sis of methanol from CO and H_2O, is explained. The mechanism of water
formation was determined by estimating the methane contents in the gas.
The reaction of water formation during the initial stages of methanol
synthesis takes place at a much higher rate than the rate of reaction
leading to the formation of methyl alcohol. The effect of various
catalyst on the H_2O formation is discussed. Table.

Institution   :   ...

Presented by :   Academician S. I. Vol'fkovich, April 16, 1954

BOCHAROV, N.F., kand.tekhn.nauk; KRADINOV, Ye.B.; GUSEV, V.I.;
ABRAMOVA, E.Ye.

Testing extra-wide-lug-type tires on snow. Avt.prom. 27 no.11:
11-13 N '61.   (MIRA 14:10)

1. Moskovskoye vyssheye tekhnicheskoye uchilishche i.
Nauchno-issledovatel'skiy institut shinnoy promyshlennosti.
(Motor vehicles—Tires)

BOCHAROV, N.F.; KRADINOV, Ye.B.; GUSEV, V.I.; ZAKHAROV, S.P.; ABRAMOVA, E.Ye.

Investigating the performance of tubeless tires on sand ground.
Kauch.i rez. 21 no.3:36-40 Mr '62.   (MIRA 15:4)

1. Moskovskoye vyssheye tekhnicheskoye uchilishche imeni N.E.
Baumana i Nauchno-issledovatel'skiy institut shinnoy promyshlennosti.
(Tires, Rubber—Testing)

BOCHAROV, N.F., kand.tekhn.nauk; KRADINOV, Ye.B.; GUSEV, V.I.

Device for measuring deformations of a pneumatic tire roller.
Avt.prom. 29 no.1:24-25 Ja '63.   (MIRA 16:1)

1. Moskovskoye vyssheye tekhnicheskoye uchilishche im. Baumana.
                    (Tires, Rubber--Testing)

BOCHAROV, N.F., kand. tekhn. nauk; GUSEV, V.I., inzh.; KRADINOV, Ya.B., kand. tekhn. nauk; SEMENOV, V.M., kand. tekhn. nauk; PETRUSHOV, V.A., kand. tekhn. nauk

Motor vehicles on flexible rollers. Izv. vys. ucheb. zav.; mashinostr. no.10:89-103 '63.   (MIRA 17:3)

1. Moskovskoye vyssheye tekhnicheskoye uchilishche imeni Baumana i TSentral'nyy nauchno-issledovatel'skiy avtomobil'nyy i avtomotornyy institut.

BOCHAROV, N.F., kand. tekhn. nauk, dotsent; GUSEV, V.I., inzh.;
     KRADINOV, Ye.B., kand. tekhn. nauk; MAKAROV, S.G., inzh.

Tensometering device for measuring the deformations of a
balloon tire. Izv. vys. ucheb. zav.; mashinostr. no.2:119-
123 '64.   (MIRA 17:5)

1. Moskovskoye vyssheye tekhnicheskoye uchilishche imeni
Baumana.

balloon tires and the design of their rims. av. tyr. khoz. zav.; mashinostr. no.9:145-149 '74.

1. Moskovskoye vysaheye tekhnicheskoye uchilishche imeni N.E. Baumana.

ACCESSION NR: AP5001166   S/0113/64/000/010/0022/0025

AUTHORS: Bocharov, N. F. (Candidate of technical sciences); Gusev, V. I.; Makarov,
S. G.; Semenov, V. M. (Candidate of technical sciences); Kradinov, Ye. B. (Candidate
of technical sciences)

TITLE: Peculiarities of pneumatic roller rolling along a hard road and deformable
soils

SOURCE: Avtomobil'naya promyshlennost', no. 10, 1964, 22-25

TOPIC TAGS: transportation, dynamic tire radius, road surface material, rolling
radius/ I 220 roller, I 245 roller, Ya 194 roller

ABSTRACT: The results of a series of investigations of the mechanics of a pneumatic
roller in contact with surfaces of various descriptions are presented. The rollers
used were of types I-220, I-245, and Ya-194. The first series of tests was for
measuring the radial deformation of the rollers under several loadings and for
parametric values of pneumatic pressure. Account is made of stiffness of the rubber
material in comparison with that of certain production tires. A constant velocity
of travel was allowed for tests of variation of rolling radius with load and internal
pressure; the results were plotted and compared for the different roller types. The

Card 1/2

ACCESSION NR: AP5001166

work was related to theoretical equations developed by Ye. A. Chudakov (Kacheniye avtomobil'nogo kolesa. Izd. AN SSSR, M., 1948). Rolling resistance was related to radial deflection and rolling radius, and these resistance forces were found to be in close agreement with Chudakov's hypotheses. Testing apparatus described by N. F. Bocharov, V. I. Gusev, and Ye. B. Kradinov (Avtomobil'naya promyshlennost', 1963, No. 1) was used to measure dynamic radius under braking conditions, nearly free movement, and controlled movement. Sixteen circumferential points were measured with results plotted on an oscillogram. Rolling radius and dynamic radius were compared graphically for certain test parameters. The measurements are summarized, and the variations caused by the hardness of the road surface are noted. Orig. art. has: 5 equations and 5 figures.

ASSOCIATION: MVTU imeni Baumana, NAMI

SUBMITTED: 00

SUB CODE: GO, MT   NR REF SOV: 003

ENCL: 00

OTHER: 000

Card 2/2

BOCHAROV, N.F., kand. tekhn. nauk; GUSEV, V.I.; KALININ, Ye.S., kand. tekhn. nauk; MAKAROV, S.G.; SEMENOV, V.M., kand. tekhn. nauk

Torque distribution in the transmission of motor vehicles having several driving wheels with wide-lug tires. Avt. prom. 31 no.2: 14-17 F '65.   (MIRA 18:3)

1. Moskovskoye vyssheye tekhnicheskoye uchilishche imeni Baumana i TSentral'nyy ordena Trudovogo Krasnogo Znameni nauchno-issledovatel'skiy avtomobil'nyy i avtomotornyy institut.

GUSEV, V. I.   .

Classification manual of injuries to forest and ornamental trees and bushes
of European U.S.S.R. Izd. 2. ispr. i dop. Leningrad, Goslestekhizdat, 1940.
587 p.

Yudin SB601.G8   1940

GUSEV, V. I.

25638   GUSEV, V. I.   Znamenatel'naya data. /K 50-letiyu nauch. deyatel'nosti I. V.
        Vasil'eva. Entomolog 7 Trudy Vsesoyuz. in-ta zashchitb rasteniy, vbp.
        2, 1949, s. 3-7.

SO: Letopis' Zhurnal Nykh Statey, Vol. 34, Moskva, 1949.

GUSEV, V. I.

   Opredelitel' povrezhdeniy lesnykh i dekorationykh derev'yev i kystarnikov
Yevropeyskoy chasti SSSR (Manuel for identifying injured forest and decorative trees
and shrubs in the European part of the USSR, by) V. I. Gusev (i) M. N. Rimskiy-
Korsakov. Izd. 3.
Moskva, Goslesbumizdat, 1951.
580 p. illus., diagrs.

GUSEV, V. I.

5674. GUSEV, V. I. Vrediteli Po'ya, Ogoroda, Sada i Lesa. Posobiye Dlya Uchiteley Sred. Shkolo:. 3-E is ;r. 1 Dop. lzd. Kiev, 《Rad. Shkola》 1954. 288 s. s Ill.; 71. Ill. 22 s. m. 8,000 Ekz. 7r v per.—Bibliogr: s 277.--Na urk. Yaz.--(55-156)632.6/7 / (016.3)

SO: Knizhnaya, Letoppis, Vol. 1, 1955

GUSEV, V. I.

The Committee on Stalin Prizes (of the Council of Ministers USSR) in the fields of science and inventions announces that the following scientific works, popular scientific books, and textbooks have been submitted for competition for Stalin Prizes for the years 1952 and 1953. (Sovetskaya Kul'tura, Moscow, No. 22-40, 20 Feb - 3 Apr 1954)

Name	Title of Work	Nominated by
Gusev, V. I. Rimskiy-Korsakov, M. N.	"Handbook for Determining Types of Damage to Forest and Decorative Trees and Shrubs of the European USSR"	Kiev Forestry Institute

SO: W-30604, 7 July 1954

GUSEV, V.I.; ANTONYUK, S.I.

Migration method of scarabaeid larvae (Coleoptera, Scarabaeidae) in
the soil. Ent.oboz.35 no.1:56-59 '56.   (MIRA 9:10)

1.Kiyevskiy Lesotekhnicheskiy Institut, Kiyev.
                    (Scarabaeidae) (Larvae)

GUSEV, V.I.

In memory of Zinovii Stepanovich Golevianko. Ent.oboz.35 no.1:230-236
'56.   (Golevianko, Zinovii Stepanovich, 1876-1953)   (MLRA 9:10)

COUNTRY   : USSR

CATEGORY   : General and specialized Zoology. Insects.
                  Harmful Insects and Acarids.   P

ABS. JOUR.   : RZhBiol., No.23, 1958, No.105385

AUTHOR   : Gusev, V. I., Javris, V. A.
INST.   :

TITLE   : Spindle Tree Snout Moth Alispa angustella Hb. (Lepidoptera
                  Pyralidae) — A Pest of Spindle Tree Seeds.

ORIG. PUB.   : Zool. zh., 1957, 36, No. 10, 1580-1583

ABSTRACT   : In Ukraine, the snout moth produces two generations. The
                  flight of the first generation lasts up to 2 weeks from the
                  end of May. In 7-16 days caterpillars emerge from the eggs
                  deposited on the set fruits and gnaw into one fruit. Up
                  to 4 caterpillars feed on the seeds in the boll. Pupation
                  takes place in the litter starting with the last 10 days of
                  July. The flight of the II generation lasts from the end
                  of July to the 2nd half of August. The caterpillars of
                  the II generation appear in August-September and later.
                  Pupation takes place in white cocoons in the soil at the
                  depth of to 5 cm. Most severely injured are the fruits of

Card: 1/2

Chair of Entomology, Ukr. Acad Agric Sci

SHMIGOVSKIY, Konstantin Andreyevich; GUSEV, Valentin Ivanovich;
    PARSADINOVA, K.G., red.; FEDOTOVA, A.F., tekhn.red.

[Pests of field, garden, orchard, and forest; a manual
for teachers in secondary schools] Vrediteli polia, ogoroda,
sada i lesa; posobie dlia uchitelei srednei shkoly. Moskva,
Gos.uchebno-pedagog.izd-vo M-va prosv.RSFSR, 1958. 327 p.
                                        (MIRA 12:7)
        (Agricultural pests)

GUSEV, V.I.(Kiyev)

Conference on forest protection in Prague (Czechoslovakia). Ent.
oboz. 37 no. 2:491-498 '58.   (MIRA 11:7)
              (Prague--Forest protection--Congresses)

ANFINNIKOV, Mikhail Aleksandrovich, kand. sel'khoz.nauk; GUSEV, V.I.,
    prof., red.; BLANINA, L.F., red.; KVITKA, S.P., tekhn. red.

[Leopard moth and its control] Drevesnitsa v"edlivaia i bor'ba
s nei. Kiev, Izd-vo Ukrainskoi Akad.sel'khoz.nauk, 1961. 153 p.
                                        (MIRA 15:1)
          (Plants--Diseases and pests)

GUSEV, Valentin Ivanovich,prof.,lesnoy entomolog; RIMSKII-KORSAKOV,Mikhail Niko-
layevich, prof., lesnoy entomolog [1873-1951]; YATSENTKOVSKIY, Aleksey
Vladimirovich; SHIPEROVICH, Vladimir Yakovlevich, lesnoy entomolog;
POLUBOYARINOV, Ivan Ivanovich, lesnoy entomolog; IL'INSKIY, A.I., dots.,
retsenzent; POLOZHENTSEV, P.A., prof., retsenzent; KHRAMTSOV, N.N., red.;
ARNOL'DOVA, K.S., red. izd-va; BACHURINA, A.M., tekhn. red.

[Forest entomology] Lesnaia entomologiia. Izd.4., perer. pod obshchim
rukovodstvom i red. V.I.Guseva. Moskva, Goslesbumizdat, 1961. 486 p.
                                          (MIRA 14:7)
1. Zaveduyushchiy kafedroy entomologii Ukrainskoy akademii sel'sko-
khozyaystvennykh nauk (for Gusev)
                    (Forest insects)

GUSEV, Valentin Ivanovich[Husiev, V.I.]; YERMOLENKO, Valeriy Mikhaylovich
        [Ermolenko, V.M.]; SVISHCHUK, Valentina Viktorovna[Svyshchuk,
        V.V., deceased]; SHMIGOVSKIY, Konstantin Andreyevich
        [Shmyhovs'kyi, K.A., deceased]; KLYUCHKO, Z.F., red.; SHEVCHENKO,
        L.I., tekhn. red.

        [Atlas of insects of the Ukraine]Atlas komakh Ukrainy. Kyiv,
        Derzh.uchbovo-pedagog.vyd-vo "Radians'ka shkola," 1962. 222 p.
                                                    (MIRA 16:2)
                        (Ukraine--Insects)

GUSAKOV, M.Ya.; GUSEV, V.K.

Delustring of capron fiber. Khim.volok. no.3:28 '62.
(MIRA 16:2)

1. Engel'sskiy zavod.

(Nylon)

GUSEV, V.K.

Experience with improvement and landscape gardening of urban areas.
Gor. khoz. Mosk. 36 no.9:32-35 S '62.   (MIRA 15:10)
    (Moscow—Air—Pollution) (Moscow—Landscape gardening)

SUBJECT: USSR/ Welding   135-3-12/17

AUTHOR: Gusev V.M., foreman.

TITLE: Self-Propelled Welding Machine Designed by Foreman N.I. Krylov'
              (Samokhodnyi svarochnyi agregat konstruktsii mastera N.I.
              Krylova).

PERIODICAL: "Svarochnoye Proizvodstvo", 1957, # 3, p 26 (USSR)

ABSTRACT: N.I. Krylov, a foreman of the Syzran' Petroleum Refinery
              has designed and built a welding machine on wheels for use in
              outdoors work on pipelines. He has utilized the frame of the
              welding aggregate "CAK-2г-1", which he made 100 mm longer on the
              side of the gasoline engine, and 900 mm longer on the generator
              side. The frame together with the welding aggregate has been
              put on wheels with pneumatic tires. The driving mechanism con-
              sists of automobile parts. The radiator is removed to the
              rear. The fan is placed on the water pump shaft, which intensi-
              fies cooling. The entire aggregate is encased in a sheet
              metal hood with ventilation slots. Two oxygen containers are
              located on the left side of the unit; on the right side there
Card 1/2   is the acetylene generator. Two automobile headlights serve

135-3-12/17

TITLE: Self-Propelled Welding Machine Designed by Foreman N.I. Krylov'
              (Samokhodnyi svarochnyi agregat konstruktsii mastera N.I.
              Krylova).

              for lighting the road at night and provisions are made for
              illuminating the place of work at night by a special portable
              projector.

              The maximum speed of the unit is 15 km/hr.
              Operation is simple, and a former driver - instructed by
              Krylov - managed to weld during 6 hours work twice as much as
              it could be done in one 8-hour working day with a conventional
              unit and the common work organization.

ASSOCIATION: Syzran' Petroleum Refinery (Syzranskiy neftepererabatyvayushchiy
              zavod).

PRESENTED BY:

SUBMITTED:

AVAILABLE: At the Library of Congress.

Card 2/2

SOV/124-58-8-8721

Translation from: Referativnyy zhurnal, Mekhanika, 1958, Nr 8, p 53 (USSR)

AUTHOR: Gusev, V.M.

TITLE: On the Calculation of the Water Pipes of a Vertical Hot-water-circulation Heating System (K raschetu truboprovodov vertikal'noy protochnoy vodyanoy sistemy otopleniya)

PERIODICAL: Nauchn. tr. Leningr. inzh.-stroit. in-ta, 1955, Nr 20, pp 88-109

ABSTRACT: For calculation of vertical pipe networks of hot-water-circulation heating systems it is recommended that systems already built in which pressure losses are known be used. Experimental data obtained from ready-built systems with attached measuring instruments, as analyzed graphically, disclose a relationship of the form

$$E = \Delta p / \rho u^2 = f(R)$$

Values for the hydraulic-resistance coefficient λ of the pipes are computed with the formulae of G.A. Murin (Izv. Vses. teplotekhn. in-ta, 1938, Nr 10) and those for the local resistance

Card 1/2

SOV/124-58-8-8721

On the Calculation of the Water Pipes (cont.)

coefficient of the fittings from data obtained by P.N. Kamenev, author of
OST (All-Union Standard) Nr 90036-39; both sets of values are tabulated.
Formulae are given for calculating the pressure in the vertical-flow stand
pipes as the water cools. To determine the weight-flow rate of the water in
a stand pipe, the author evolves an incomplete cubic equation which he
recommends solving either analytically or with the help of a nomogram in-
cluded in the article. Numerical examples illustrate the use of the formulae
and graphs recommended by the author, and a description is given of a
special slide rule designed to simplify the operations involved in the calcu-
lating methods proposed by him.

V.I. Gotovtsev

Card 2/2

L 29337-66   EWP(k)/EWT(d)/EWP(h)/EWP(l)/EWP(v)

ACC NR: AR5023228   SOURCE CODE: UR/0272/65/000/008/0025/0025

AUTHOR: Gusev, V. M.   43
                                                                         B
TITLE: Contactless measurement of the thickness of sheets

SOURCE: Ref. zh. Metrologiya i izmeritel'naya tekhnika, Abs. 8.32.193

REF SOURCE: Sb. Oborud. dlya pererabotki polimerov. Kiyev, Tekhnika, 1964, 191-194

TOPIC TAGS: measuring instrument,   automatic regulation, vibration
measurement,   synthetic material

ABSTRACT: An instrument for measuring the thickness of linoleum without backing dur-
ing the process of rolling on a four-roller calender is described. The instrument was
designed at the automation laboratory of the UkrNIIplastmass Institute. The operation
of the instrument is based on the principle of change of the complete acoustic resist-
ance in the air duct of built-up sections, determined by the distance of the sensing
element from the surface of the material to be measured, fixed about some sort of
backing. The principal electric circuit of the instrument is shown and described.
Tests have shown that the instrument is suitable for contactless continuous regula-
tion of the thickness of strips and sheets, for indicating the location of films in
the automatic lines, and for contactless indication of machine part vibrations with
remote transmission of the reading. 3 illustrations. S. Kolesnikov

SUB CODE: 14,13/   SUBM DATE: none

Card 1/1   CC   UDC: 389:531.717.5:621.034.4

GUSEV, V.M. (Leningrad)

Simplifying the choice of heating furnaces. Vod. i san. tekh.
no.11:33-34 N '60. (MIRA 13:11)
(Furnaces, Heating)

FEDOROV, Nikolay Fedorovich, prof., doktor tekhn. nauk; GUSEV, Valerian
Mikhaylovich, dotsent, kand. tekhn. nauk; POPRUGIN, I.V., inzh.,
retsenzent; MOROZOV, N.I., inzh., retsenzent; GEFDING, A.K., kand.
tekhn. nauk, nauchnyy red.; STEPANOV, D.A., inzh., nauchnyy red.;
ZHURAVSKIY, N.A., red.; VOLCHOK, K.M., tekhn. red.; PUL'KINA, Ye.A.,
tekhn. red.

[Sanitary engineering] Sanitarnaia tekhnika. Leningrad, Gos. izd-vo
lit-ry po stroit., arkhit. i stroit. materialam, 1961. 371 p.
                                              (MIRA 14:6)
            (Sanitary engineering)

GUSEV, V. M.   DECEASED   1963/2

                               c' 1962

ZOOLOGY -
epidemology

                               sooILC

GUSEV, V.M.; BEDNYY, S.N.; GUSEVA, A.A.; LABUNETS, N.F.; BAKEYEV, N.N.

Ecological groups of birds of the Caucasus and their role
in the life of ticks and fleas. Trudy Nauch.-issl. proti-
vochum. inst. Kav. i Zakav. no.5:217-267 '61.

(MIRA 17:1)

RYLESHNIKOVA, M.M.; GUSEV, V.M.; FRIDMAN, M.L.; PUNGA, V.E.

Portable machine for shabot repair. Mashinostroitel' no.2:22
F '62.   (MIRA 15:2)
                        (Milling machines)

GUSEV, V.M.; TIFLOVA, L.A.; GUSEVA, A.A.; BEDNYY, S.N.

Notes on fleas and ticks in Askaniya-Nova. Trudy Nauch.-
issl. protivochum. inst. Kav. i Zakav. no.5:268-275 '61.
                                               (MIRA 17:1)

GUSEV, V. M.

GUSEV, V.M., CHKUASELI, D.V., GUSEVA, M.I.   89-9-4/32

AUTHOR

TITLE The Separation of Ge and Mg Isotopes in a small
Magnetic Separator.
(Razdeleniye izotopov germaniya i magniya v malom elektro-
magnitnom separatore)

PERIODICAL Atomnaya Energiya, 1957, Vol. 3 , Nr 9, pp 315-321

ABSTRACT Of a small electromagnetic separator (920 x 1500 x 350 mm)
(built according to Dempter's mass spectograph) particularly
the new construction of the ion source and of the ion target
are described. The ion source, in which the discharge is
maintained in the vapor of the element to be investigated,
works satisfactorily up to temperatures of 1500°C. The ion
target is constructed in such as manner that it collects all
isotopes of the element to be separated at one and the same
time. The dependence of the ion flux, which was focussed on
the target has been particularly well measued. In the case
of Ge- separation the ion flux at the target attained
15-20 mA at Mg 35-40 mA. In the chambers of the target about
40 mg of the enriched germanium isotopes and ~ 25 mg of the
magnesium isotopes were separared per hour.
The mass-spectrographical investigation was carried out on
metallic germanium and on MgJ_2.

CARD 1/2

G. USEL, V. M.

PHASE I BOOK EXPLOITATION   SOV/1397

Vsesoyuznaya nauchno-tekhnicheskaya konferentsiya po primeneniyu radioaktivnykh i stabil'nykh izotopov i izlucheniy v narodnom khozyaystve i nauke, Moscow, 1957

Primeneniye izotopov, Meshchanoye gamma-ustanovki. Radiometriya i dozimetriy; trudy konferentsii... (Isotope Production, High-energy Gamma-Radiation Facilities. Radiometry and Dosimetry; Transactions of the All-Union Conference on the Use of Radioactive and Stable Isotopes and Radiation in the National Economy and Science) Moscow, Izd-vo AN SSSR, 1958. 293 p. 5,000 copies printed.

Sponsoring Agency: Akademiya nauk SSSR; Glavnoye upravleniye po ispol'zovaniyu atomnoy energii SSSR.

Editorial Board: Frolov, Yu.S. (Resp. Ed.), Zhavoronkov, N.M. (Deputy Resp. Ed.), Aglintsev, K.K., Alekseyev, B.A.; Bochkarev, V.V., Lezhninskiy, N.I., Malkov, T.P., Sinitsyn, V.I., and Popov, G.L. (Secretary); Tech. Ed.: Movichkov, N.D.

PURPOSE: This collection is published for scientists, technologists, persons engaged in medicine or medical research, and others concerned with the production and/or use of radioactive and stable isotopes and radiation.

COVERAGE: Thirty-eight reports are included in this collection under three main subject divisions: 1) production of isotopes, 2) high-energy gamma-radiation facilities, and 3) radiometry and dosimetry.

TABLE OF CONTENTS:

PART I. PRODUCTION OF ISOTOPES

This article describes the basic structural features of an ultra-high-temperature ion source and gives the results of its use in separating Pd, Pt, Ru, and Ir in a small electromagnetic separator. A hot cathode discharge is maintained in vapors of the element being separated and isotope ions are drawn from the gas discharge chamber through an aperture. A lateral electron beam with energies of 20-25 kev creates chamber temperatures up to 2800° C.

Card 1/12

21(5)

AUTHOR: Gusev, V. M.   SOV/89-5-6-5 / 25

TITLE: Electromagnetic Separation of Platinum Isotopes (Elektro-
             magnitnoye razdeleniye izotopov platiny)

PERIODICAL: Atomnaya energiya, 1958, Vol 5, Nr 6, pp 641 - 642 (USSR)

ABSTRACT: A new ion source is described, which permits work to be
             carried out at temperatures of up to 2800°C. The gas discharge
             chamber is a hollowed-out cone the entire front of which is
             bombarded with a well-collimated cylindrical electron beam
             and is thus heated. A homogeneous magnetic field causes the
             collimation of electrons. An electron gun serves as electron
             source. The crucible containing the metal to be separated
             is placed into the cone, where it serves as anode during the
             discharge. The frontal surface has a gap through which the
             electrons are able to emerge. The electron collector volt-
             age and the electron acceleration voltage are furnished by
             one and the same high-voltage plant.
             The ion source was used in a 180°-electromagnetic separator.
             During separation of the platinum isotopes the operational
             conditions of the source were the following:

Card 1/4

Electromagnetic Separation of Platinum Isotopes   SOV/89-5-6-6/25

Discharge current in platinum vapor	0,5 A
Discharge voltage	250 V
Consumption of material	0,3 to 0,4 g/h
Power necessary for heating the gas-discharge chamber	3 - 3,5 kW
Electron flux	130 - 140 mA
Temperature in the gas-discharge chamber	~2250^{o}C
Acceleration voltage	25 kV
Working vacuum in the separation chamber	1-2.10^{-5} mm Hg
Average current in the collectors of the separator	2,5 to 3,5 mA

The enrichment of the platinum isotopes was tested by means of the mass spectrometer М? ∙. The following degrees of enrichment were attained:

Card 2/4

Electromagnetic Separation of Platinum Isotopes   SOV/89-5-6-6/25

$$Pt^{192} \qquad 16.2 \%$$
$$Pt^{194} \qquad 72.3 \%$$
$$Pt^{195} \qquad 62.2 \%$$
$$Pt^{196} \qquad 41.7 \%$$
$$Pt^{198} \qquad 67.1 \%$$

With the exception of Pt^{166}-enrichment, the other values are better than those obtained at the Oak Ridge Laboratory.
The ion source is used also for the separation of Ru-, Ir-, and Os-isotopes.
V. S. Zolotarev assisted in carrying out experiments.
B. A. Alekseyev carried out the separation of the platinum isotopes. V. A. Suzdalev and K. G. Ordzhonikidze carried out mass-spectrometrical platinum analyses. There are 2 figures, 1 table, and 1 reference,   which is Soviet.

SUBMITTED: September 7, 1958

Card 3/4